

13790510059

5

4

3

2

1

F



E

D

C

B


A

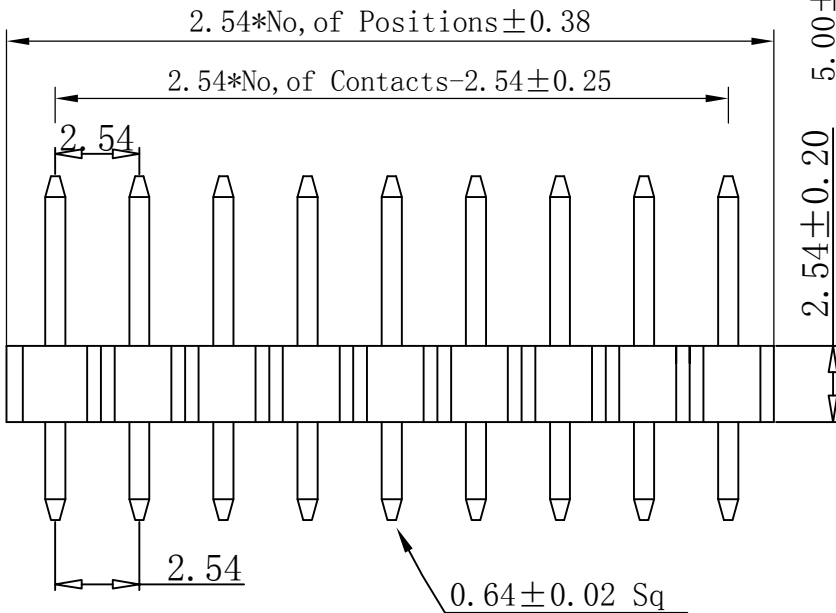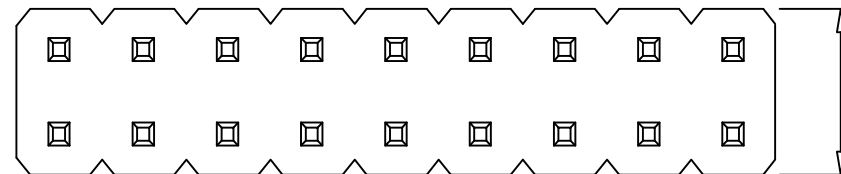

SPECIFICATIONS

Current Rating: 3Amp
Insulator resistance: 1000MΩ min.
Dielectric Withstanding: 600AC/DC
Operating Temperature: -20~+85° C
Contact Material: Brass
Insulator Material: PA6T
Contact Resistance: 20mΩ Max
UNSPECIFIED TOLERANCE: ±0.20

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

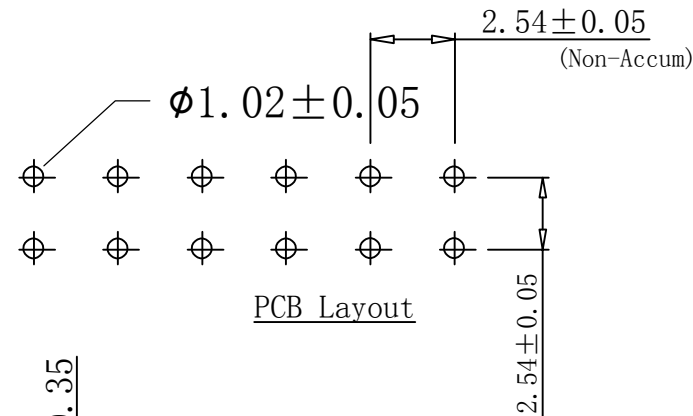

PA6.0 ± 0.35

PC3.0 ± 0.25

Contacts	Dimensions		Contacts	Dimensions	
	A	B		A	B
2*1	2.54	0	2*21	53.34	50.80
2*2	5.08	2.54	2*22	55.88	53.34
2*3	7.62	5.08	2*23	58.42	55.88
2*4	10.16	7.62	2*24	60.96	58.42
2*5	12.70	10.16	2*25	63.50	60.96
2*6	15.24	12.70	2*26	66.04	63.50
2*7	17.78	15.24	2*27	68.58	66.04
2*8	20.32	17.78	2*28	71.12	68.58
2*9	22.86	20.32	2*29	73.66	71.12
2*10	25.40	22.86	2*30	76.20	73.66
2*11	27.94	25.40	2*31	78.74	76.20
2*12	30.48	27.94	2*32	81.28	78.74
2*13	33.02	30.48	2*33	83.82	81.28
2*14	35.56	33.02	2*34	86.36	83.82
2*15	38.10	35.56	2*35	88.90	86.36
2*16	40.64	38.10	2*36	91.44	88.90
2*17	43.18	40.64	2*37	93.98	91.44
2*18	45.72	43.18	2*38	96.52	93.98
2*19	48.26	45.72	2*39	99.06	96.52
2*20	50.80	48.26	2*40	101.6	99.06



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2504H-2*NPX-F

品名 TITLE: 2.54排针双排直针单塑

材料:

单位:

MM

包装规格:

比例:

1:1

制图:


审核:

核准:

日期:

2025. 3. 20

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°



XCL