

13790510059



5

4



3

2

1

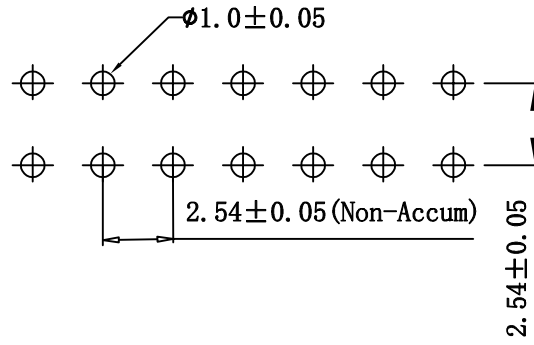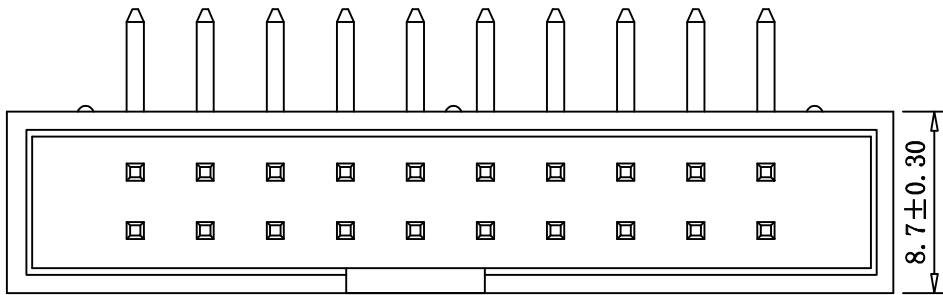

Contacts Per row	Dimensions	
	A+7.7	B
2*3	7.62	5.08
2*4	10.16	7.62
2*5	12.70	10.16
2*6	15.24	12.70
2*7	17.78	15.24
2*8	20.32	17.78
2*9	22.86	20.32
2*10	25.40	22.86
2*11	27.94	25.40
2*12	30.48	27.94
2*13	33.02	30.48
2*14	35.56	33.02
2*15	38.10	35.56
2*16	40.64	38.10
2*17	43.18	40.64
2*18	45.72	43.18
2*19	48.26	45.72
2*20	50.80	48.26
2*22	55.88	53.34
2*23	58.42	55.88
2*24	60.96	58.42
2*25	63.50	60.96
2*26	66.04	63.50
2*32	81.28	78.74

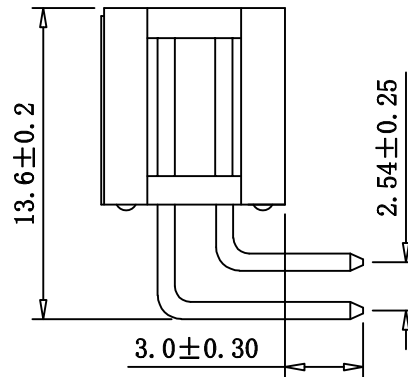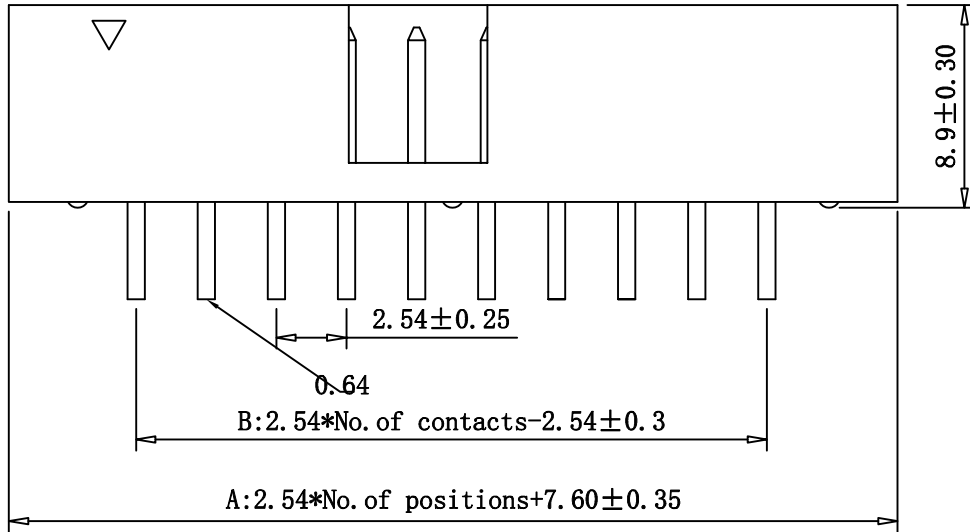

SPECIFICATIONS

Current Rating:3A mps

Insulator Resistance:5000Megohms min.

Dielectric Withstanding:AC 500V.

Operating Temperature:-20℃~85℃.

Insulator Material:PA6T

Contact Material:Brass

UNSPECIFIED TOLERANCE: ±0.25



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2534WR-2*NPB-JN

品名 TITLE: DB2.54弯针双排(JN)

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2025. 7. 15


一般公差
GENERAL TOLERANCE
X.X ±0.35
X.XX ±0.25
ANGLE ±1°

版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核 准
APPROVALBY



6

5

4

3

2

1

XCL