

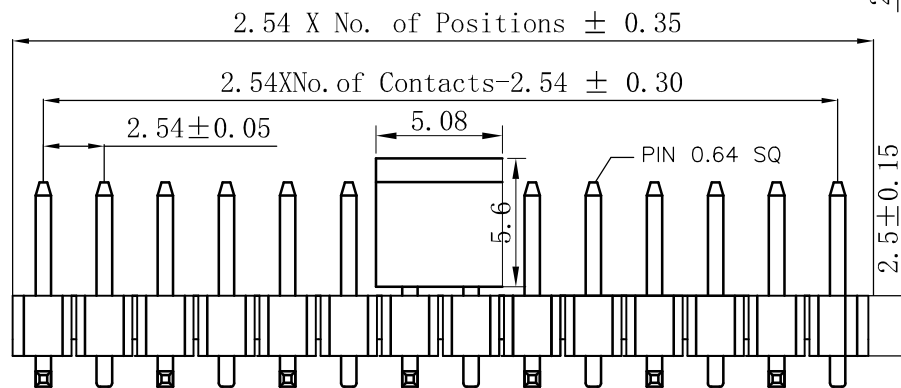
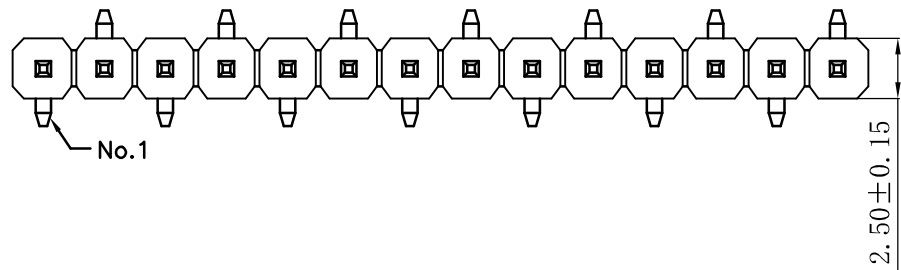


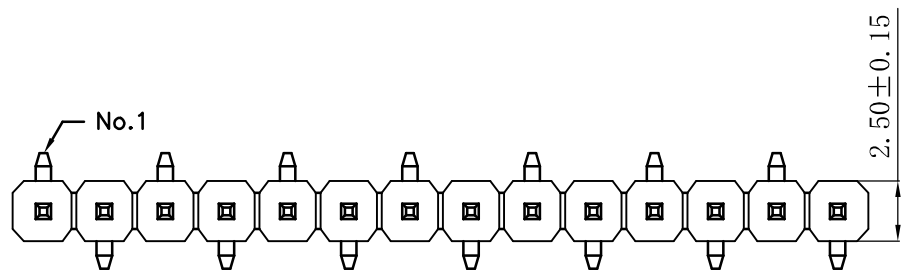


TYPE 1

TYPE 2




TYPE 1



TYPE 2

PCB LAYOUT

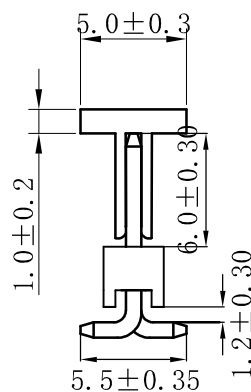

EST2504 W RS - 1*NP B - PH

W: 示意针座
W后无0: 默认材质为V0
W后带2: 示意V2

RS: 示意180° 直针, VS: 立式
R: 示意90° 弯针, RS: 卧式
RG: 高弯

1*NP: PIN数 X 本色
1: 单排
2: 双排

B: X 普通
B: 带扣
U: 超薄
PH: PH组合排针
FH: FH组合排母
H: 高弯
K: 打脚K
D: 防呆型
2: 示意有柱
LO: 带定位光K
KLO: 带定位打K

PH: X 普通
B: 带扣
U: 超薄
PH: PH组合排针
FH: FH组合排母
H: 高弯
K: 打脚K
D: 防呆型
2: 示意有柱
LO: 带定位光K
KLO: 带定位打K

SPECIFICATIONS

Current Rating: 2.5Amps
Insulator resistance: 1000 Megohms min.
Dielectric Withstaanding: AC 800V
Operating Temperature: -25°C T0+85°C
Insulator Material: PA6T
Contact Materiaal: Brass
Plating: Gold flash

UNSPECIFIED TOLERANCE: ±0.20

				料号PART NO: EST2504WRS-1*NPX-X	一般公差 GENERAL TOLERANCE
				品名 TITLE: DB2.54立贴(单排)	X.X ±0.30
				材料:	X.XX ±0.20
				单位: MM	ANGLE ±1°
版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	审核:
				包装规格:	核 准:
				比例: 1:1	日期: 2022.7.13



DGEASTOM

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.