

13790510059

5

4

3

2

F

F

E

E

D

D

C





C

B

B

A

A

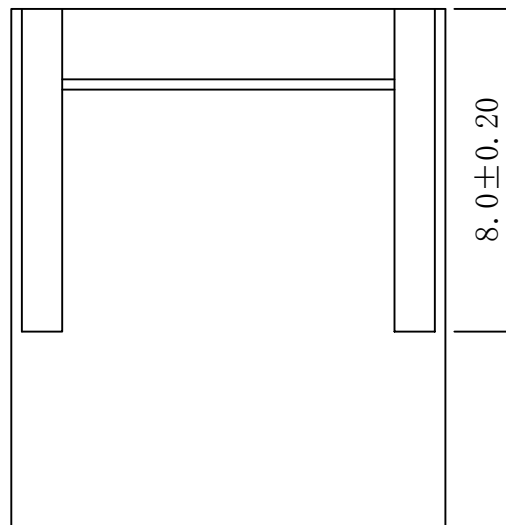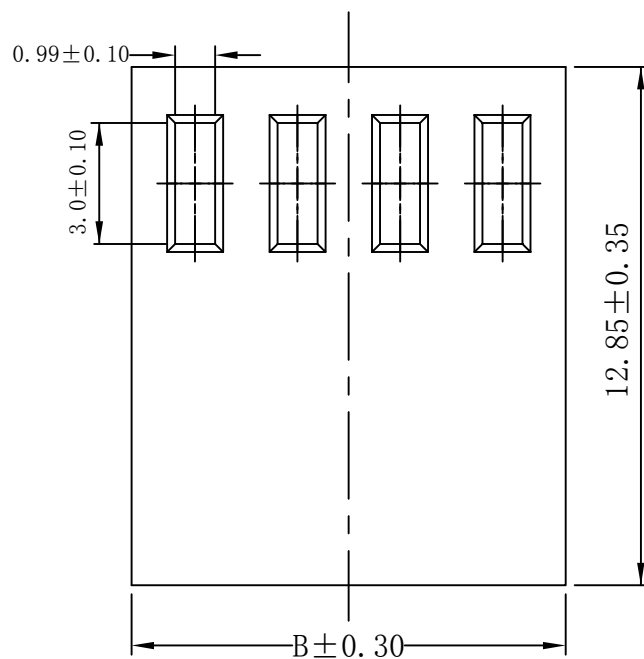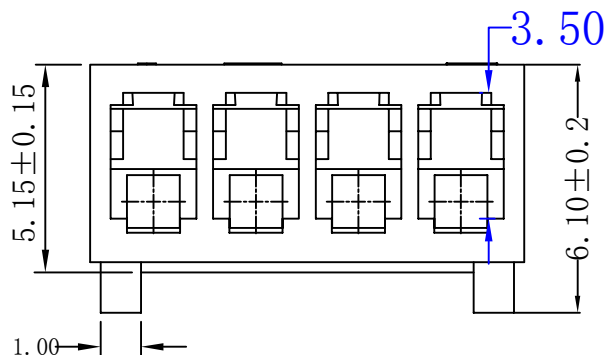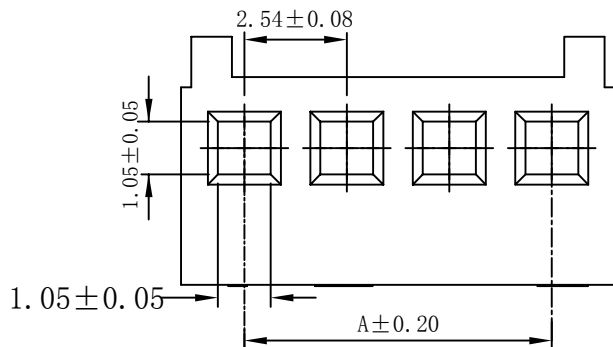

NO	Dimensions	
	A	B
2P	2.54	5.68
3P	5.08	8.22
4P	7.62	10.76
5P	10.16	13.30
6P	12.70	15.84
7P	15.24	18.38
8P	17.78	20.92

EST2510 H - 1*NP X - X - X - HF-NK - X

↑ 羿通代码+间距 ↑ H 示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2 ↑ 1 示意单排 2 示意双排 ↑ PIN数 ↑ X 本色 B 黑色 R 红色 L 蓝色 Y 黄色 G 绿色 C 透明 ↑ X 普通 B 带扣 C 刺破 2L 示意两侧带锁扣 U 超薄 F 防呆型 HV 带高凸点 LC 带低凸点, K 卡槽 E 有耳 ↑ X 胶壳 G 母胶壳 ↑ NO MARK ↑ HF 示意无卤 NF 普通含卤 ↑ A 灼热丝750 B 灼热丝850 X 普通料

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 2A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max
- Applicable wire: AWG#22~#28

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2510H-1*NPB-F-X

品名 TITLE: 2510-H(小)

材料: PA66

单位: MM

包装规格: 1K/包

比例: 1:1

制图:


审核:

核准:

日期: 2023.4.15

一般公差
GENERAL TOLERANCE

X. X	±0.35
X. XX	±0.20
X. XXX	±0.05
ANGLE	±2°



EST