
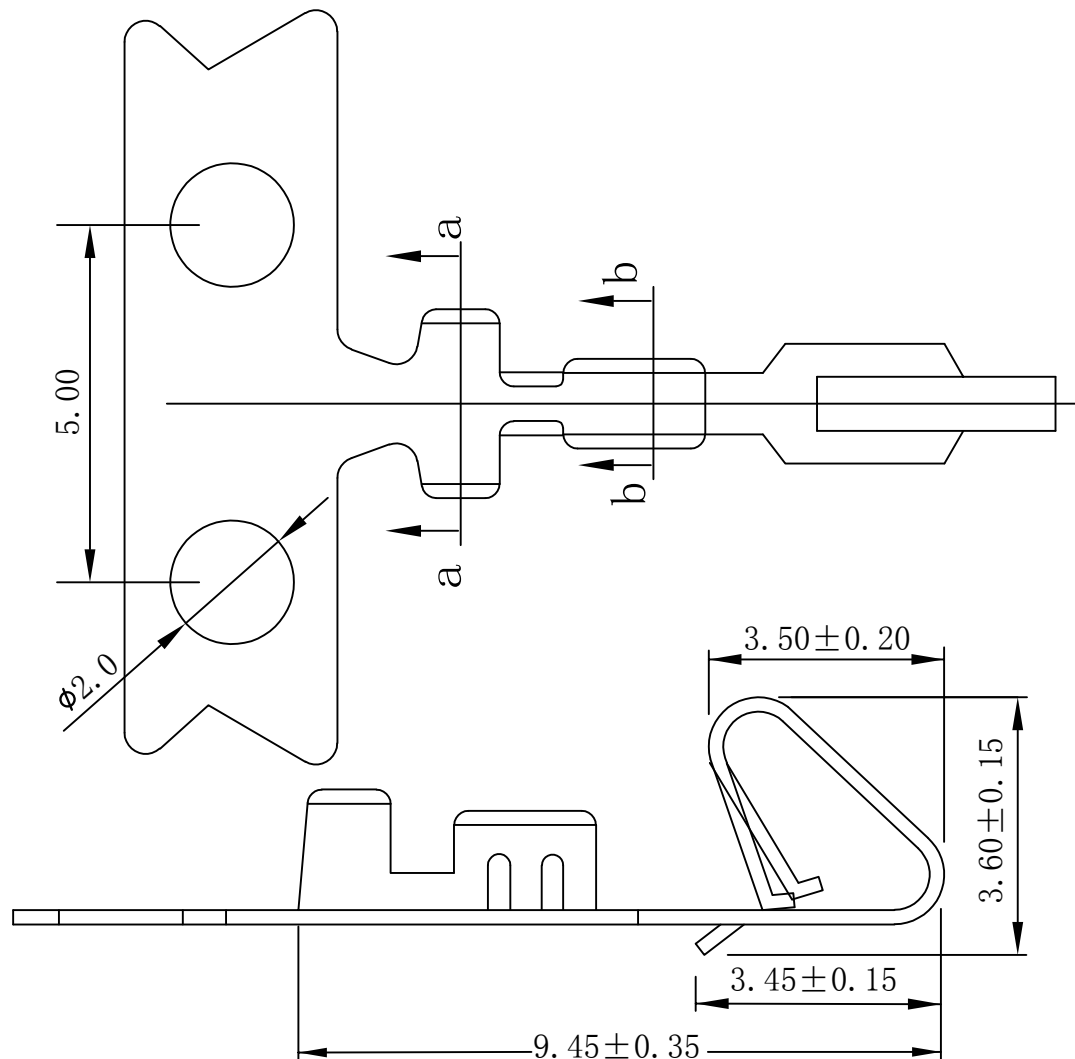



a-a SECTION

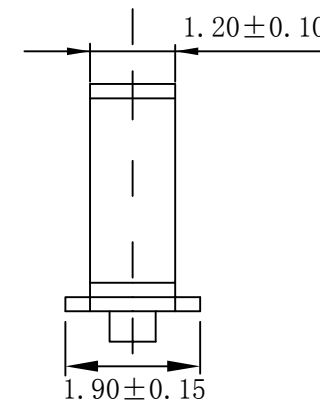

b-b SECTION

EST2510 T P X - 2 X- X

羿通代码+间距

T示意端子

X普通脚
H高脚
E增高型脚P磷铜
B黄铜
E合金铜0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全镍(镀后冲)
4.2镀全镍先冲后镀
5G、15G示意镀金5U"或15U", 1G示意镀金1U"X公端
G母端
C示意90°
S示意180°X普通
L长
S短
U超薄

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 2A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max
- Applicable wire: AWG#22~#28



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2510TPX-2X-G

品名 TITLE: 2510-T

材料: C5191

单位: MM

包装规格: 10K/卷

比例: 1:1


制图:

审核:

核准:

日期:
2023/04/15日期版次
REVISION日期
DATE变更内容
DESCRIPTION核 准
APPROVAL BY

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°



EST