

13790510059








5

4

3

2

1

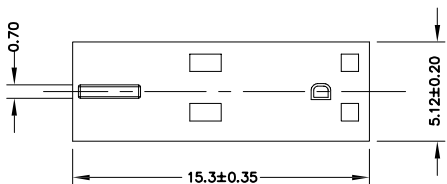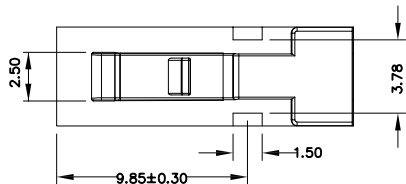

EST2517 H - 1*2P X - B - X - HF-NK - X

↑
羿通代码+间距

↑
H
H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

↑
PIN数
1示意单排
2示意双排

↑
X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑
X普通
B带扣
C刺破
L示意LOCK TYPE
U超薄F防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳

↑
X公胶壳
G母胶壳

↑
NO MARK

↑
HF示意无卤
NF普通含卤

↑
A灼热丝750
B灼热丝850
X普通料

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:1000V AC/minute
- Insulatin resistance:1000MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:20mΩ Max
- Material:PA66 UL94-V0



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2517H-1*2PX-F-X

品名 TITLE: 2517-H(Z)

材料:

单位:

MM

包装规格:

比例:

1:1

制图:

审核:

核准:

日期:

2022. 9. 30


日期版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°



6

5

4

3

2

1

ZL