



13790510059

5


4

3


2

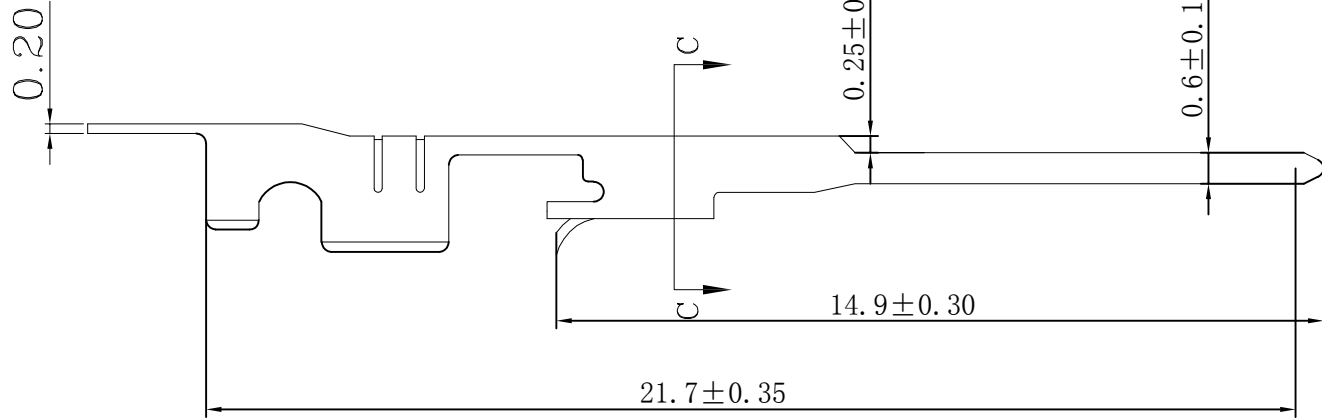


A-A



B-B

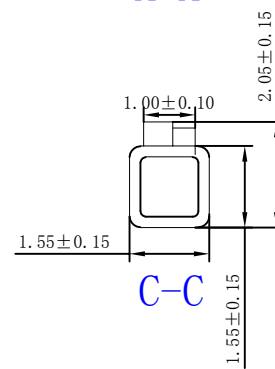

C-C

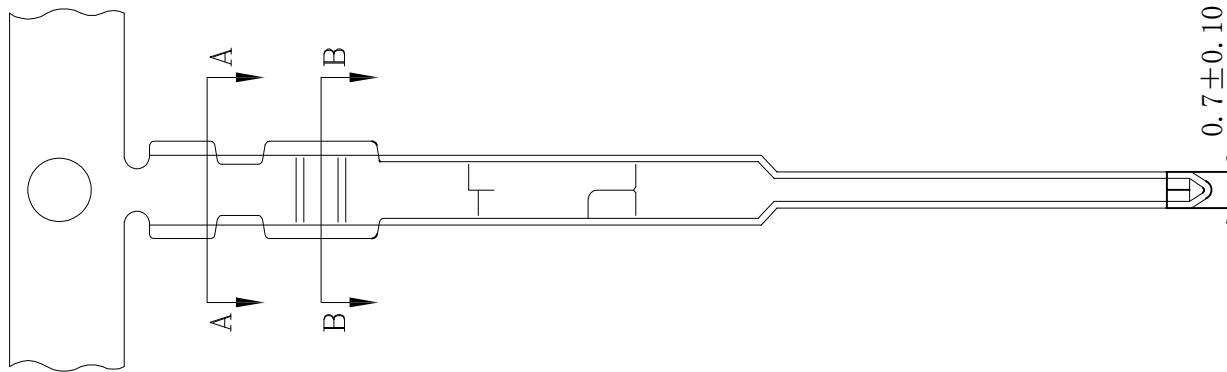

EST2517 T P X - 2 X - X

↑ 羿通代码+间距 ↑ T示意端子 ↑ X普通脚 ↑ H高脚 ↑ E增高脚 ↑ X普通 ↑ L长 ↑ S短 ↑ X公端 ↑ G母端 ↑ C示意90° ↑ S示意180°

0素材
P磷铜
B黄铜
E合金铜
2镀锡先冲后镀
3镀锡先镀后冲
5G、15G示意镀金5U"或15U"
1G示意镀金1U"

SPECIFICATIONS

- Applicable wire: AWG#22~#28
- Voltage rating: 250V DC/AC (rms)
- Current rating: 2.5A
- Withstand voltage: 800V AC(rms)
- Working Temperature: -25℃+85℃
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤0.02Ω

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY




东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2517TPX-2X-X

品名 TITLE: YCDG-T(公)

材料: C5191	单位: MM	包装规格: 10K/卷	比例: 1:1
制图: 胡宗星	审核: 李园	核准: 李海平	日期: 2023/07/07

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°



YQ