

1


SINGLE CONTACT TYPE

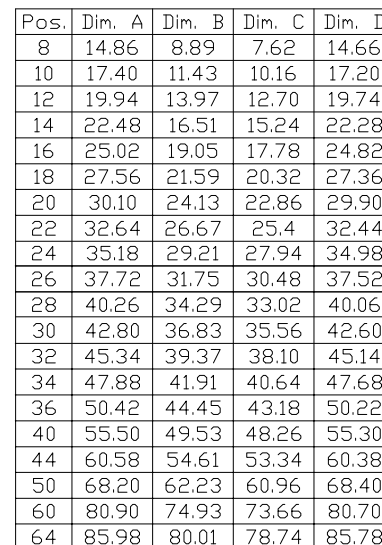


东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

核 准
APPROVAL BY

一般公差	
GENERAL TOLERANCE	
X, X	± 0.30
X, XX	± 0.20
ANGLE	$\pm 1^\circ$



KS

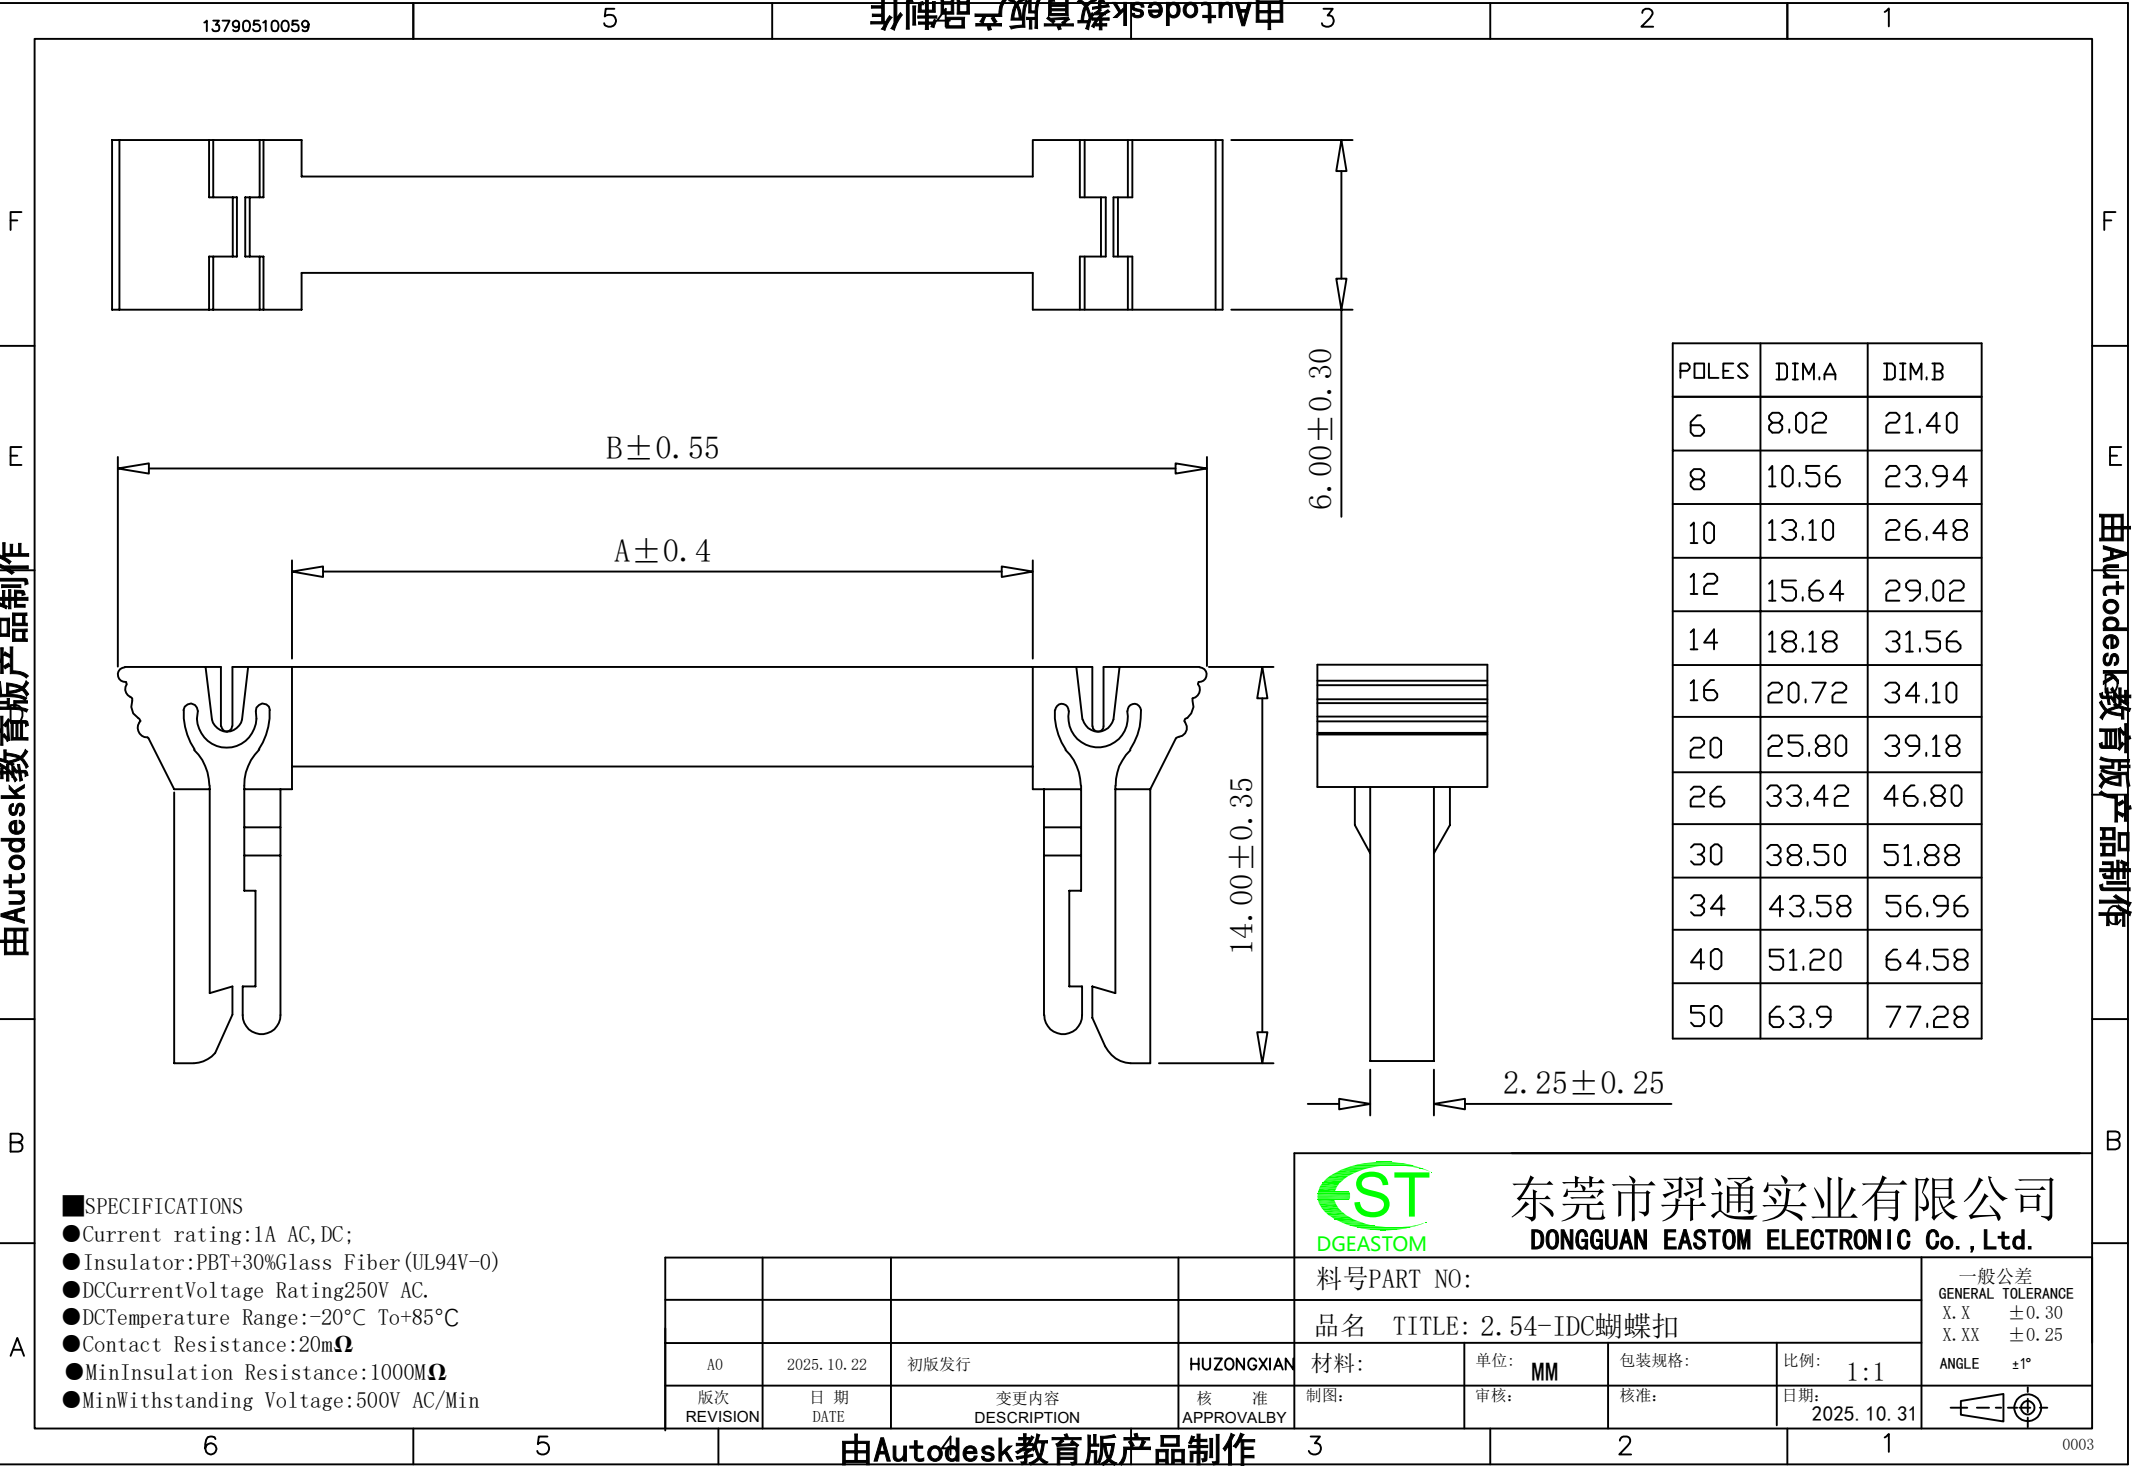

■ SPECIFICATIONS

- Current rating: 1A AC, DC;
- Insulator: PBT+30% Glass Fiber (UL94V-0)
- DC Current Voltage Rating 250V AC.
- DC Temperature Range: -20°C To +85°C
- Contact Resistance: 20mΩ
- Min Insulation Resistance: 1000MΩ
- Min Withstanding Voltage: 500V AC/Min



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO:

品名 TITLE: 2.54-1DC蝴蝶扣

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2025. 10. 31

一般公差
GENERAL TOLERANCE

X. X ± 0.30

X. XX ± 0.25

ANGLE ± 1°

