

13790510059

5

4

3

2

F

E

D

C

B

A

F




E

D


C

B

A

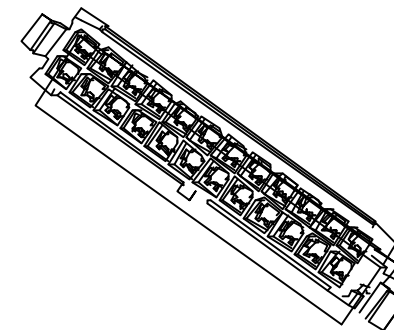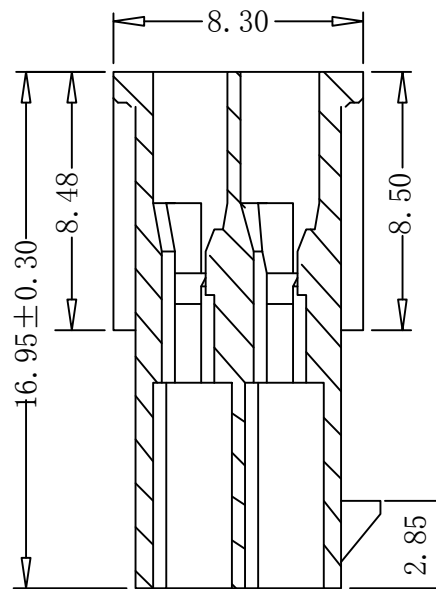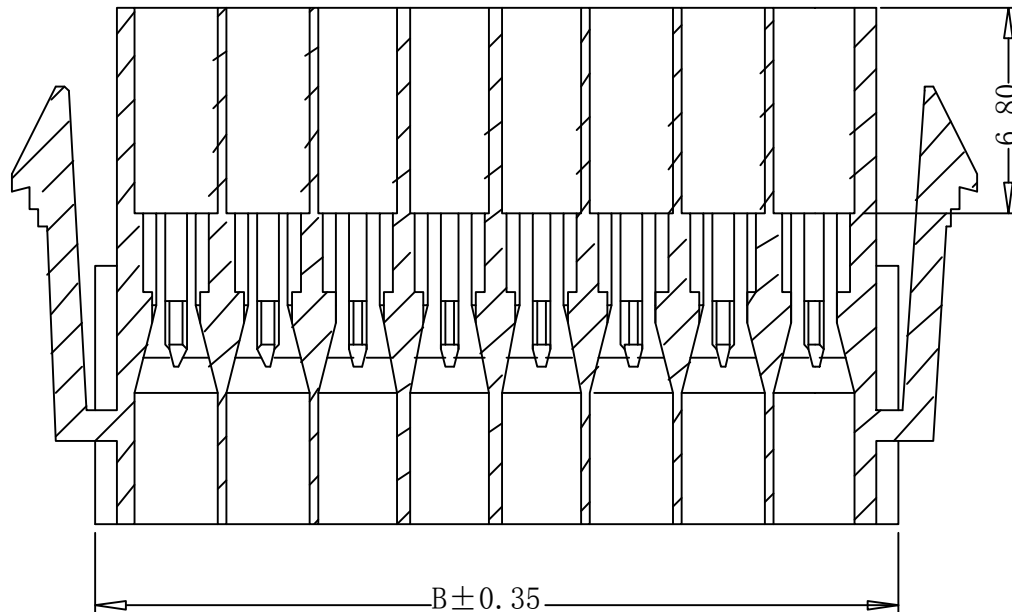

POLES	Dimensions mm	
	A	B
2*1P	/	5.4
2*2P	3.0	8.4
2*3P	6.0	11.4
2*4P	9.0	14.4
2*5P	12.0	17.4
2*6P	15.0	20.4
2*7P	18.0	23.4

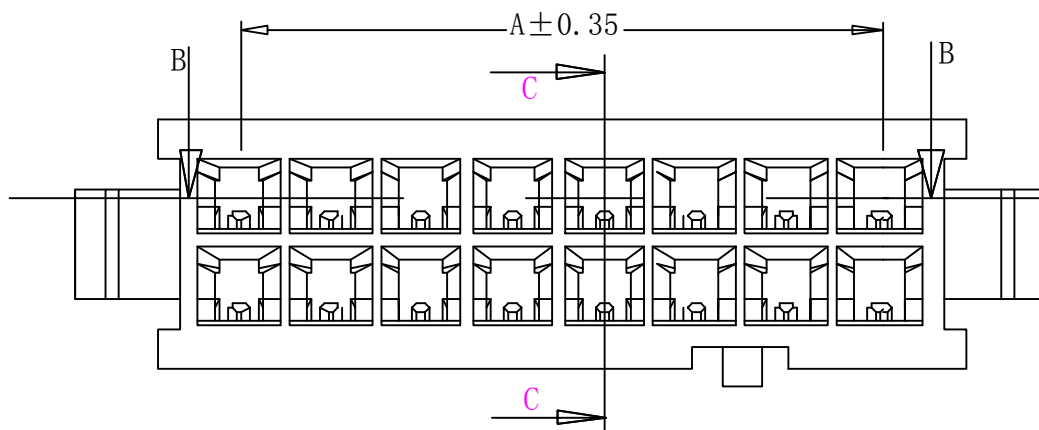

EST3001 H - 2*NP X - E - G - HF-NK - X

↑ 羿通代码+间距

↑ PIN数

↑ X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑ X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳

↑ X公胶壳
G母胶壳

↑ NO MARK

↑ A灼热丝750
B灼热丝850
X普通料

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

HF示意无卤
NF普通含卤

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25° C ~ +85° C

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3001H-2*NPB-E-G

品名 TITLE: MX3.0-H母(有耳双排)

材料: PA66	单位: MM	包装规格: 1K/bag	比例: 1:1
制图:	审核:	核准:	日期: 2023/03/18

一般公差
GENERAL TOLERANCE

X. X	± 0.30
X. XX	± 0.20
ANGLE	$\pm 1^\circ$



ZL