

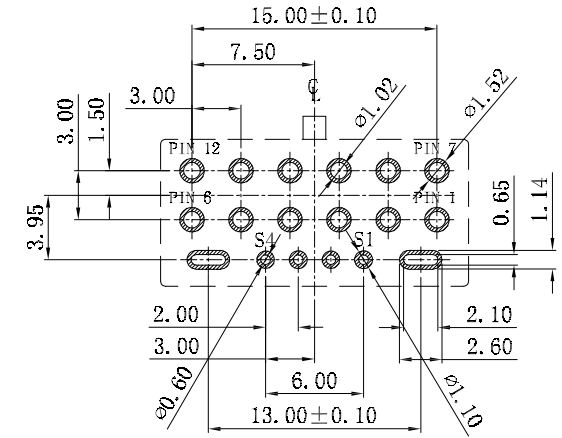

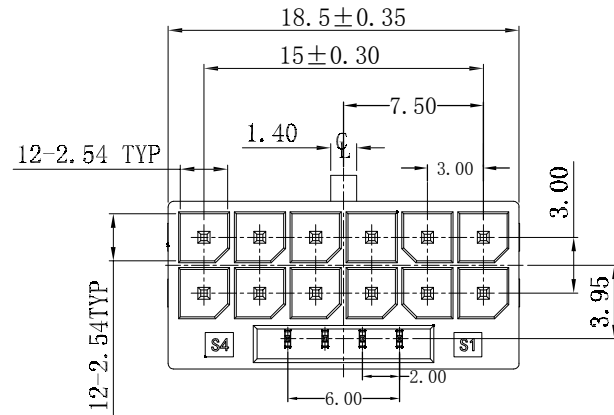
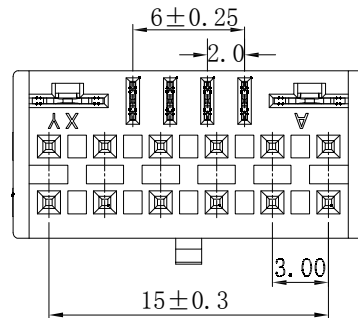
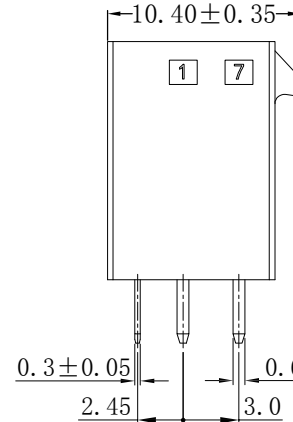


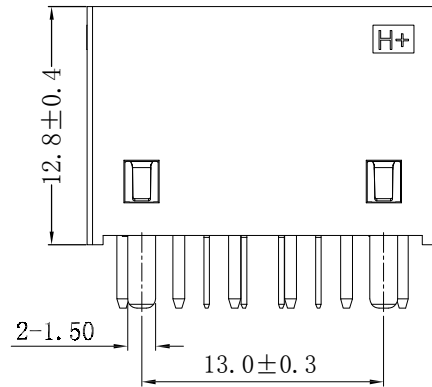

RECOMMEND P.C.B LAYOUT
TOLERANCE: ±0.05 (TOP VIEW)



PIN SIGNAL	PIN NO
PWR PIN	1~6
GND PIN	7~12
S1	CARD_PWR_STAB
S2	CARD_CBL PRES
S3	SENSE0
S4	DO NOT USF

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C ~ +85°C

EST3002 W V - 2*NP X - X - X X - NK-HF

↑ 异通代码+间距

↑ PIN数
1单排
2双排

↑ X本色
B黑色
R红色
L蓝色
Y黄色
G绿色

↑ X普通
B带扣
U超薄
PH组合排针
FH组合排母
H高弯
K打脚K
D防呆型
2示意有柱
LO带定位无K
KLO带定位打K

↑ G为PIN针镀金
S为PIN针镀锡

↑ 1为PPS, 2为PBT,
3为LCP, 4为ABS, 5为PA6T,
6为PA66

↑ NK为NO MARK
MK为有MARK

↑ HP无齿
NP普通含齿

↑ V示意180°直针, VS立式
R示意90°弯针, RS卧式
RG高弯

↑ W示意针座
W后无0默认材质为V0
W后带2示意V2



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3002WV-2*NPX-X

品名 TITLE: MX3.0直针长背(双排)

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2024.01.31

日期版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°

