

13790510059





5

4

3

2

1

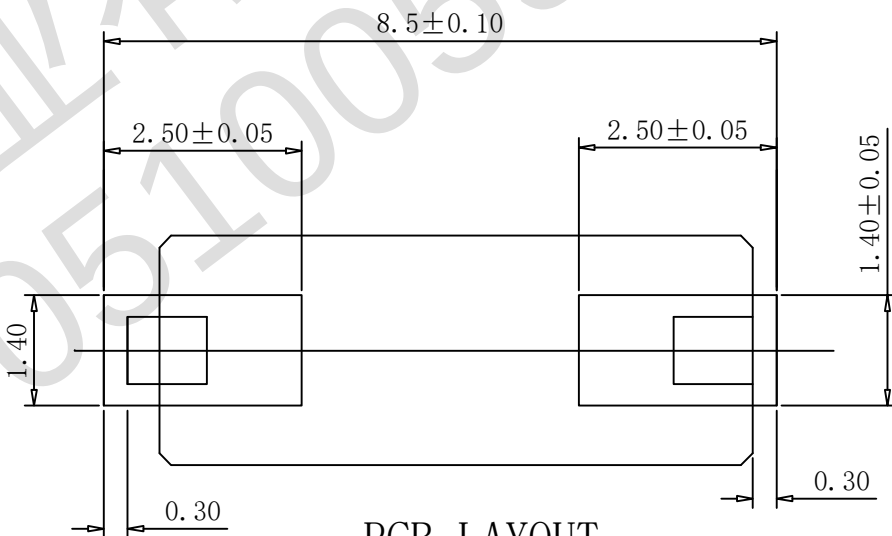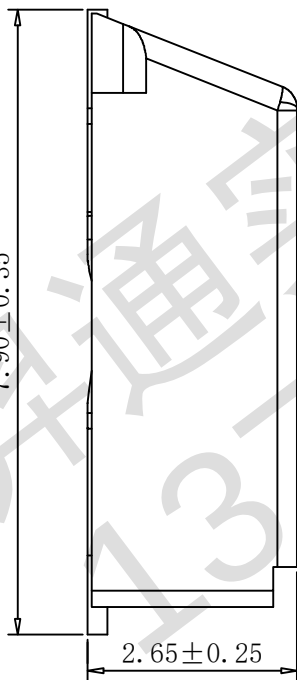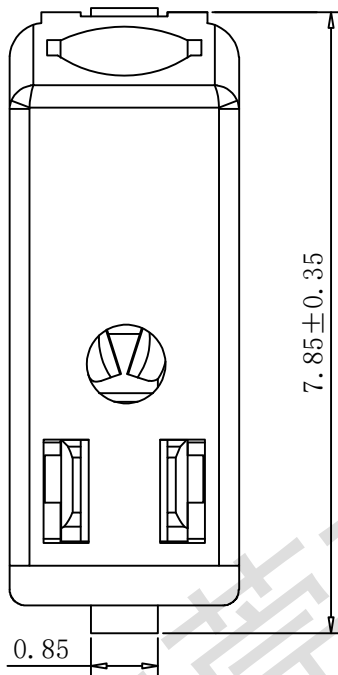

PCB LAYOUT

SPECIFICATIONS

- Voltage rating: 160V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1300V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 30mΩ Max
- Material: PIN (C2680); Shell (LCP)



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST3003WRS-2PX-X

品名 TITLE: 3003卧贴2P

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期:

2025. 10. 17

一般公差
GENERAL TOLERANCE
X. X ± 0.30
X. XX ± 0.25
ANGLE ± 1°

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY	制图:	审核:	核准:	日期:	2025. 10. 17	

6

5




4

3

2

1

HY

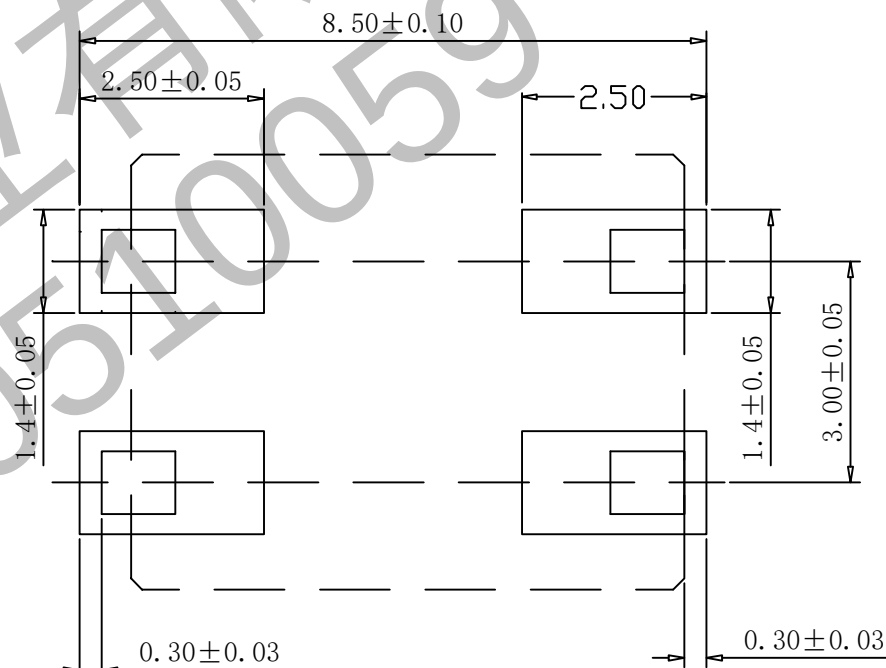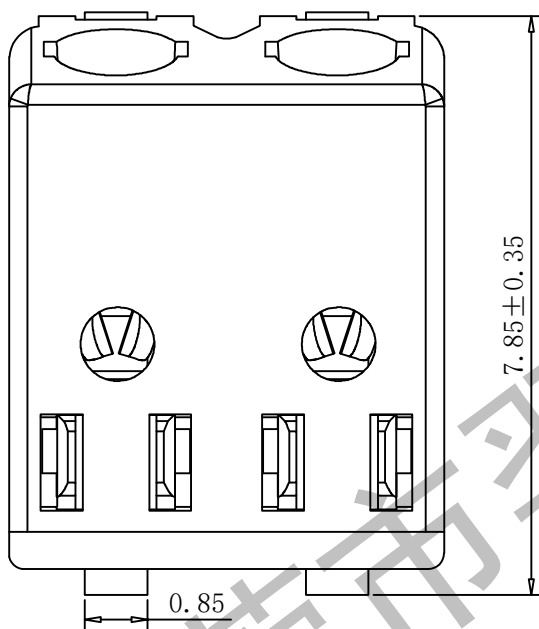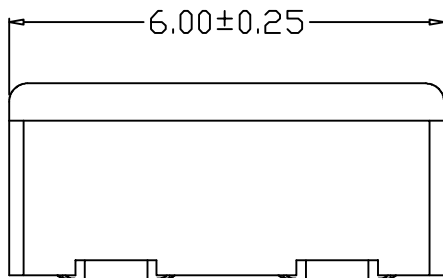PCB LAYOUT

■ SPECIFICATIONS

- Voltage rating: 160V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1300V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 30mΩ Max
- Material: PIN(C2680); Shell(LCP)



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST3003WRS-4PX-X

品名 TITLE: 3003卧贴4P

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期:

2025. 10. 17


一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°

版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核 准
APPROVAL BY



13790510059




5

4



3

2

1

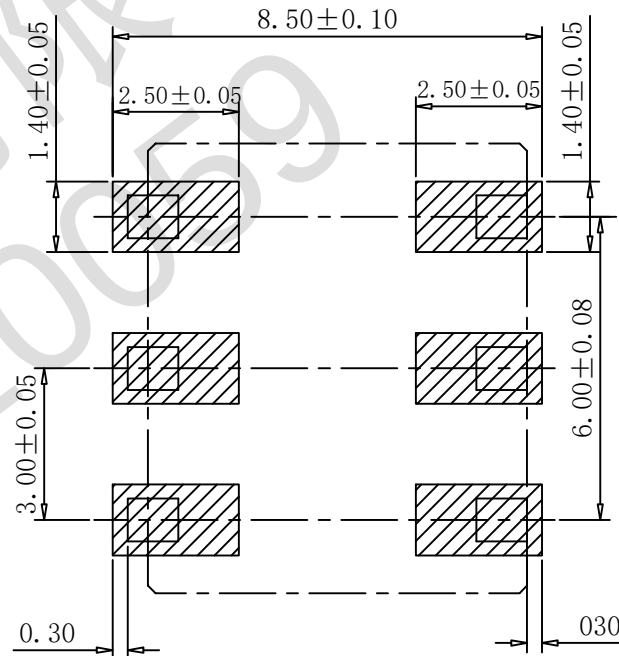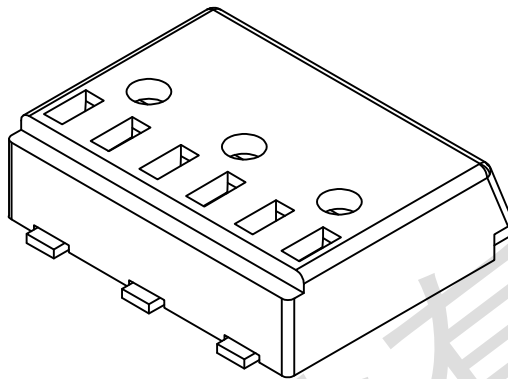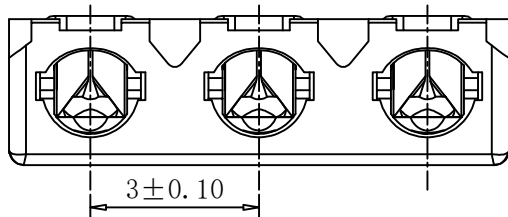

PCB LAYOUT

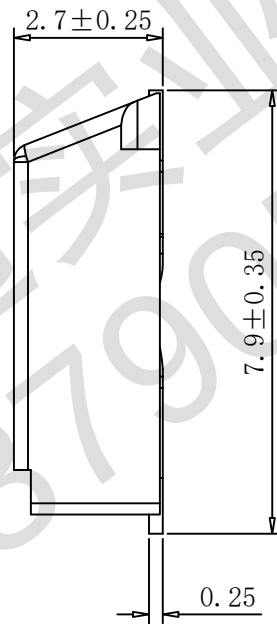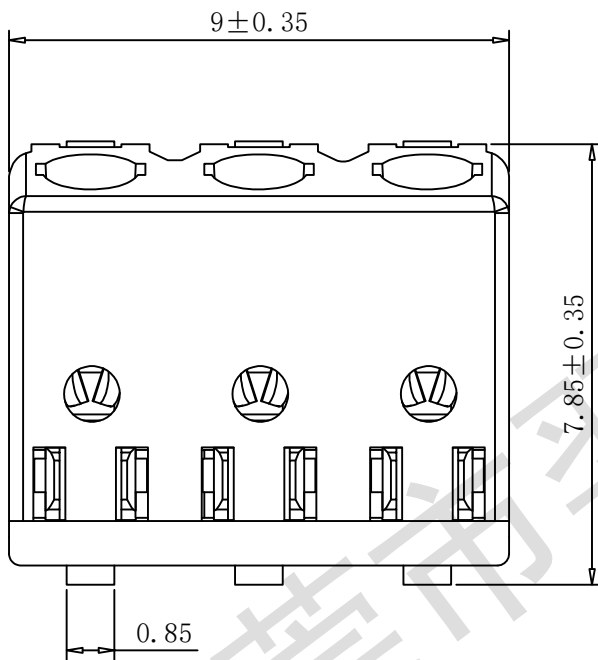

SPECIFICATIONS

- Voltage rating: 160V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1300V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 30mΩ Max
- Material: PIN(C2680); Shell(LCP)



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST3003WRS-6PX-X

品名 TITLE: 3003卧贴6P

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2025. 10. 17

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

HY