

13790510059

5

4

3

2

1

F

E

D

C

B

A

F




E

D

C

B

ZL

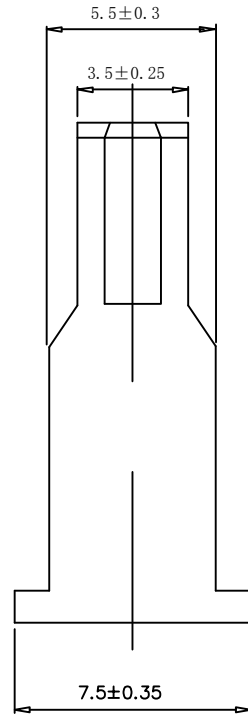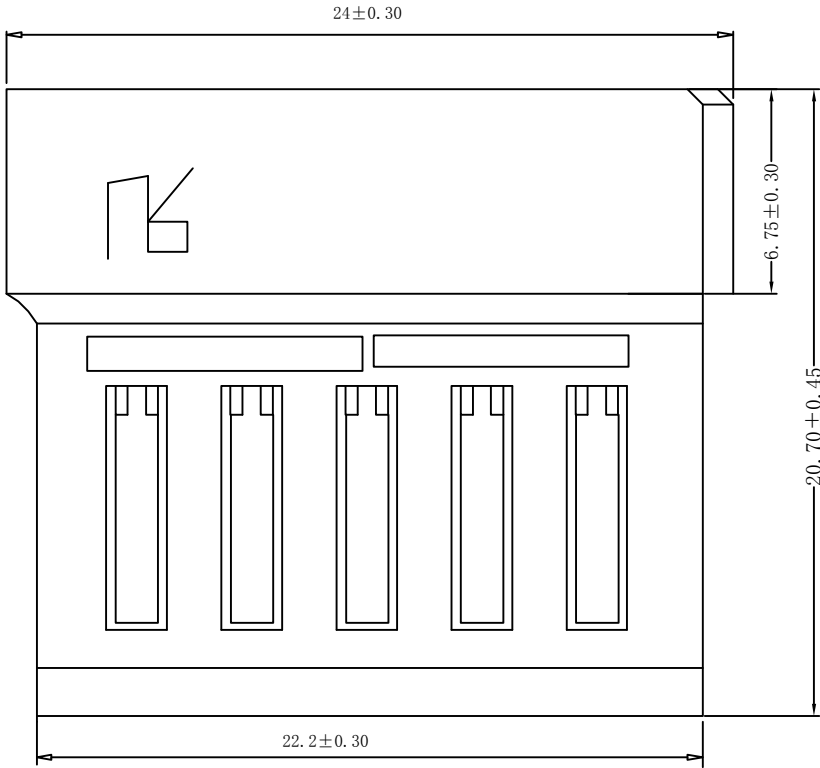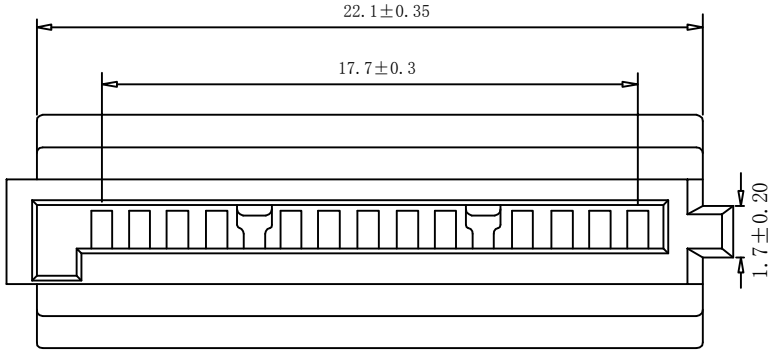

EST3800 H - 1*5P B - X - X - HF-NK - X

↑ 羿通代码+间距

↑ PIN数
1示意单排
2示意双排

↑ X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑ X公胶壳
G母胶壳

↑ NO MARK

↑ A灼热丝750
B灼热丝850
X普通料

↑ HF示意无卤
NF普通含卤

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 8A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 30mΩ Max

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

 东莞市羿通实业有限公司 DONGGUAN EASTOM ELECTRONIC Co., Ltd.			
料号PART NO: EST3800H-1*5PB-F-X			
品名 TITLE: SATA-H长体			
材料:	单位: MM	包装规格: 1000PCS/包	比例: 1:1
制图:	审核:	核准:	日期: 2023.9.1
			一般公差 GENERAL TOLERANCE X.X ±0.25 X.XX ±0.20 ANGLE ±1°

