

13790510059

5

4

3

2

1

F

E

D

C

B

A

F



E

D

C

B

A

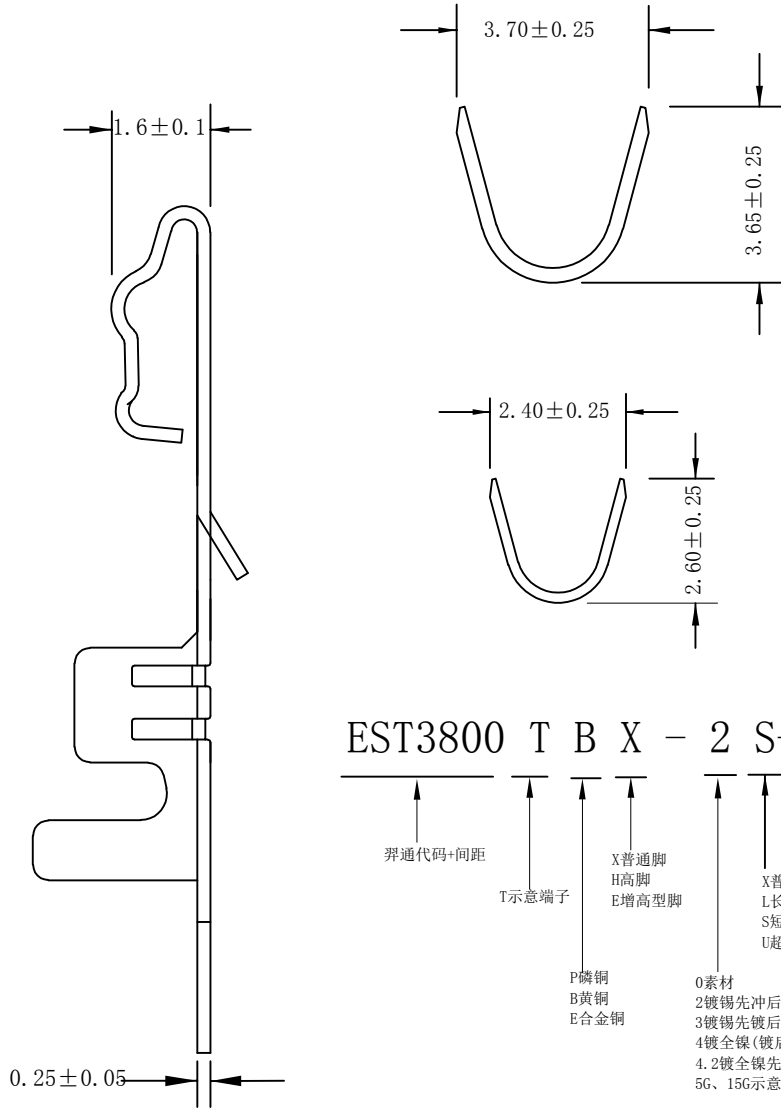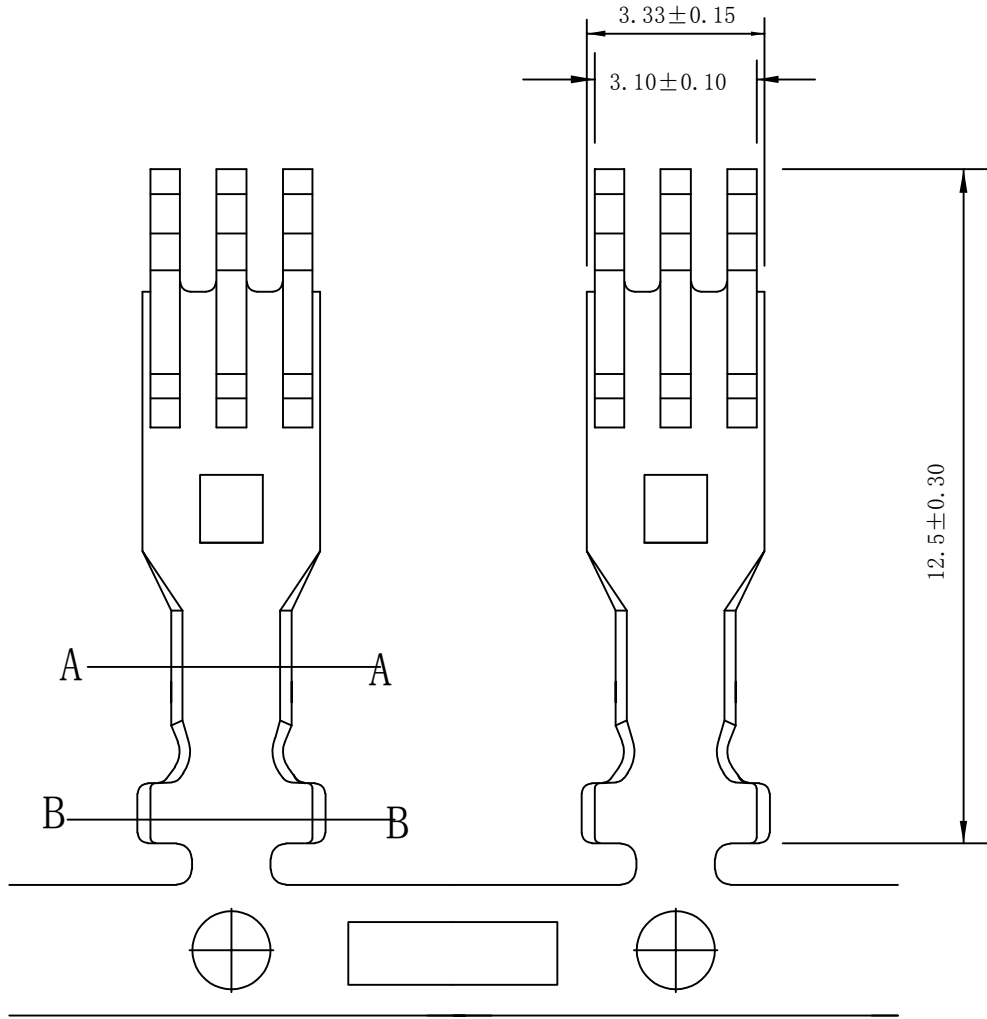

EST3800 T B X - 2 S- X

↑
异通代码+间距

↑
T示意端子

↑
X普通脚
H高脚
E增高型脚

↑
P磷铜
B黄铜
E合金铜

↑
0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全镍(镀后冲)
5. 2镀全镍先冲后镀
5G、15G示意镀金5U"或15U", 1G示意镀金1U"


↑
X公端
G母端
C示意90°
S示意180°

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 8A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 30mΩ Max

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

EST DGEASTOM 东莞市羿通实业有限公司 DONGGUAN EASTOM ELECTRONIC Co., Ltd.			
料号PART NO: EST3800TBX-2S-X			
品名 TITLE: SATA-T短(高脚)			
材料:	单位: MM	包装规格: 6000PCS/卷	比例: 1:1
制图:	审核:	核准:	日期: 2022. 8. 6
			一般公差 GENERAL TOLERANCE X. X ±0.25 X. XX ±0.20 ANGLE ±1°



EST